

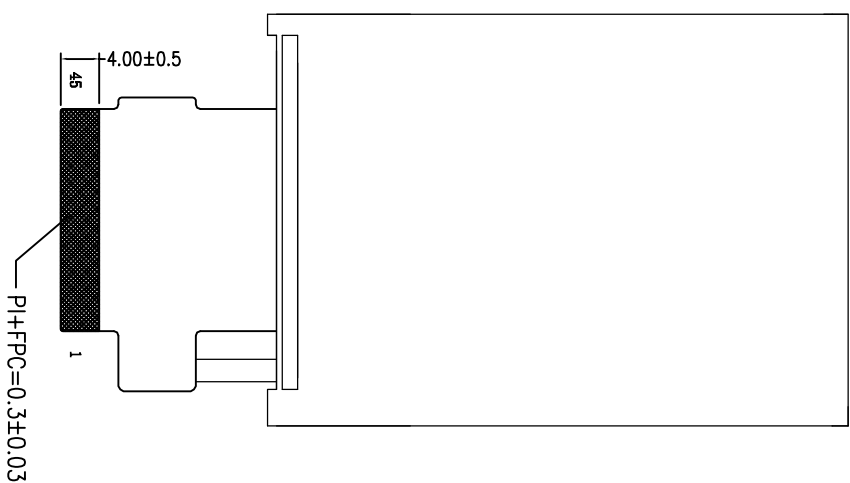


|                     |  |
|---------------------|--|
| Customer's Approval |  |
| Customer            |  |
| Date                |  |

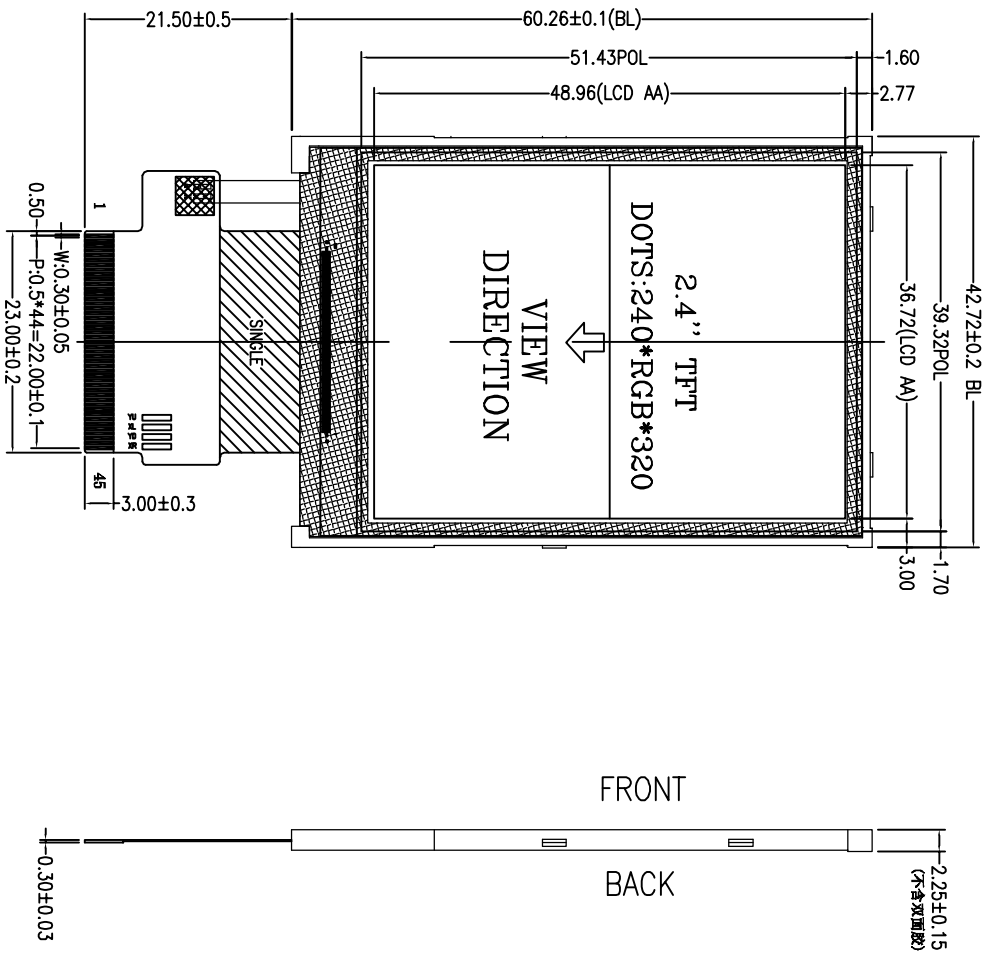

|    |       |
|----|-------|
| 1  | A     |
| 2  | K     |
| 3  | GND   |
| 4  | VCI   |
| 5  | IOWCC |
| 6  | CS    |
| 7  | DE    |
| 8  | SDA   |
| 9  | SDO   |
| 10 | RS    |
| 11 | WR    |
| 12 | RD    |
| 13 | DB0   |
| 14 | DB1   |
| 15 | DB2   |
| 16 | DB3   |
| 17 | DB4   |
| 18 | DB5   |
| 19 | DB6   |
| 20 | DB7   |
| 21 | DB8   |
| 22 | DB9   |
| 23 | DB10  |
| 24 | DB11  |
| 25 | DB12  |
| 26 | DB13  |
| 27 | DB14  |
| 28 | DB15  |
| 29 | DB16  |
| 30 | DB17  |
| 31 | PCLK  |
| 32 | HS    |
| 33 | VS    |
| 34 | RESET |
| 35 | M0    |
| 36 | M3    |
| 37 | M1    |
| 38 | TP    |
| 39 | TP    |
| 40 | TP    |
| 41 | TP    |
| 42 | GND   |
| 43 | GND   |
| 44 | NC    |
| 45 | NC    |

- NOTES: Main LCD: TFT TRANSMISSIVE 12:00  
1. DISPLAY TYPE:  
2. OPERATING TEMP: -20°C~70°C  
3. STORAGE TEMP: -30°C~80°C  
4. MAIN LCD DRIVER: LI9341V  
5. BACKLIGHT: 4CHIP-WHITE LED  
6. ROHS COMPLIANCY  
7. GENERAL TOLERANCE: ±0.2

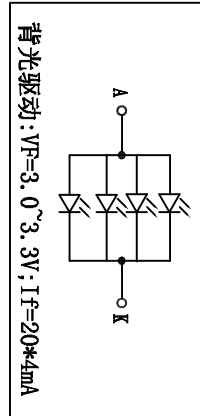

REVISED RECORD

|   |  |  |  |  |  |  |  |
|---|--|--|--|--|--|--|--|
| A |  |  |  |  |  |  |  |
| B |  |  |  |  |  |  |  |
| C |  |  |  |  |  |  |  |
| D |  |  |  |  |  |  |  |
| E |  |  |  |  |  |  |  |

深圳市上线电子有限公司

|             |                   |            |  |
|-------------|-------------------|------------|--|
| PRODUCT NO: | SX024-QVGA-45P-01 | ORG DATE   |  |
| DRAWN BY    | QIAO              | CHECKED BY |  |
| APPROVED BY |                   |            |  |