

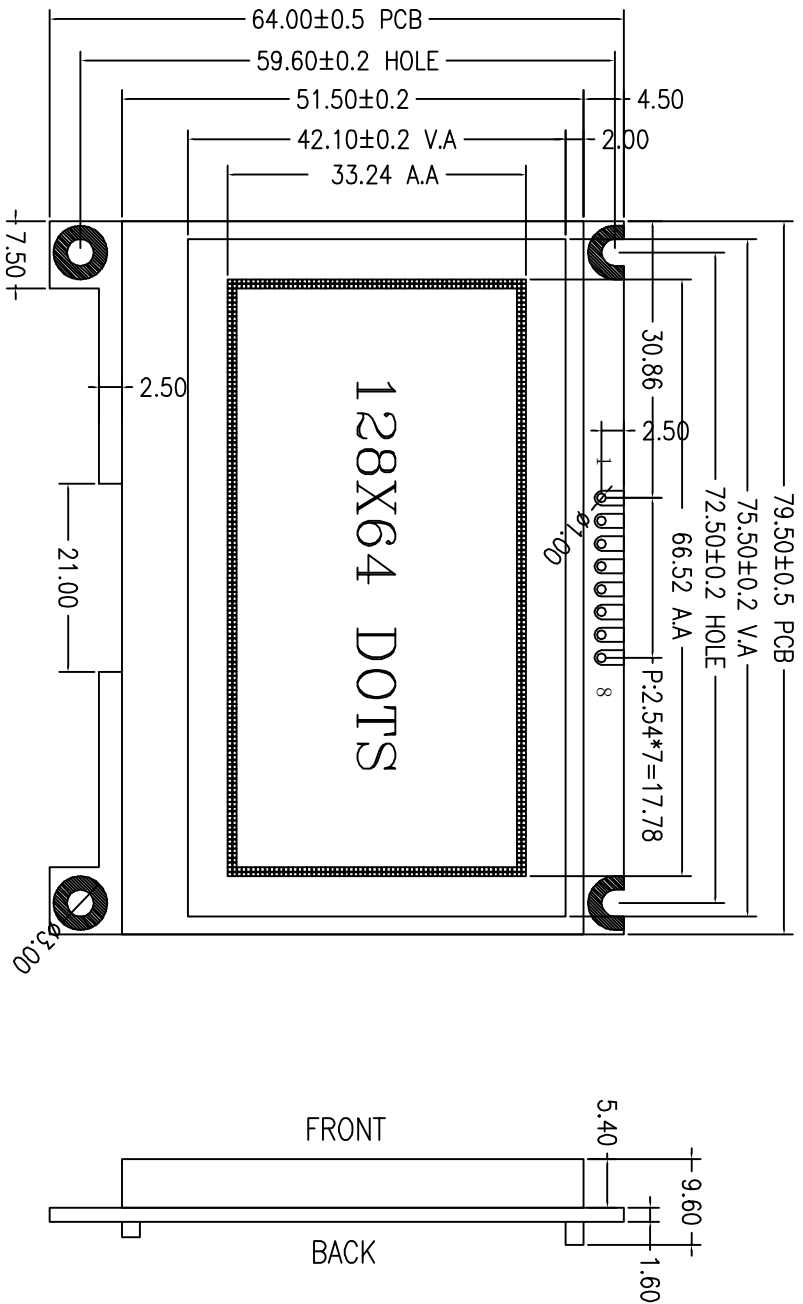
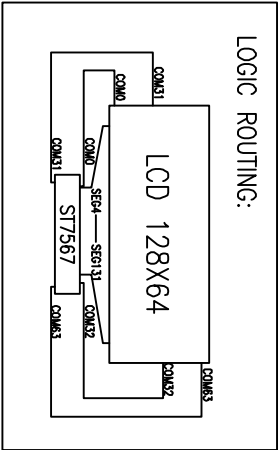


Customer's Approval	
Customer	
Date	




PIN	DESC
1	VSS
2	VDD
3	SID
4	SCLK
5	A0
6	/RST
7	/CS
8	LEDA



Specification:

- 1.Display mode:FSTN/POSITIVE/TRANSMISSIVE
2. Drive condition:1/65 Duty,1/9Bias,VDD=3.3V
3. Viewing direction:0°clock
4. Operating temperature:-20°C to +70°C
5. Backlight color:White Edge/5 leds,Parallel
6. Drive IC:ST7567
7. Connector:FPC
8. Unspecified tolerance: ±0.30mm.
9. ROHS compliant



SCALE	FREE	TOLERANCE	±0.2	深圳尚视界科技有限公司			
UNIT	mm	DRG DATE		Shenzhen SUN display Technology Co.,LTD			
MATERIAL		DRAWN BY		PROJECT NO:			
FINISH		DSN BY		MODULE NO: MD12864-01-V02			
		CHECKED BY		DWG:			
		APPROVED BY		DCN A4			
				P 1 OF 1			
				A			