



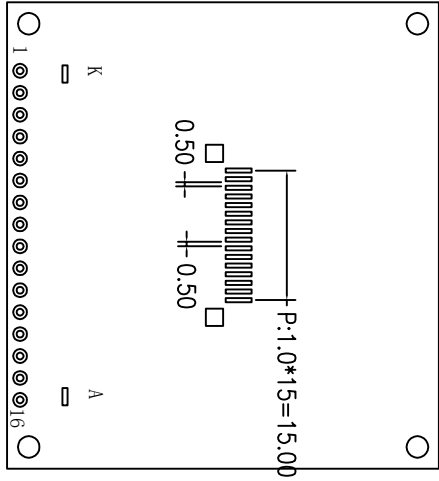


Customer's Approval	
Customer	
Date	

PIN	DESC
1	DB0
2	DB1
3	DB2
4	DB3
5	DB4
6	DB5
7	DB6(SCL)
8	DB7(SDA)
9	VDD
10	VSS
11	LED+
12	/CS
13	/RST
14	A0
15	WR
16	RD

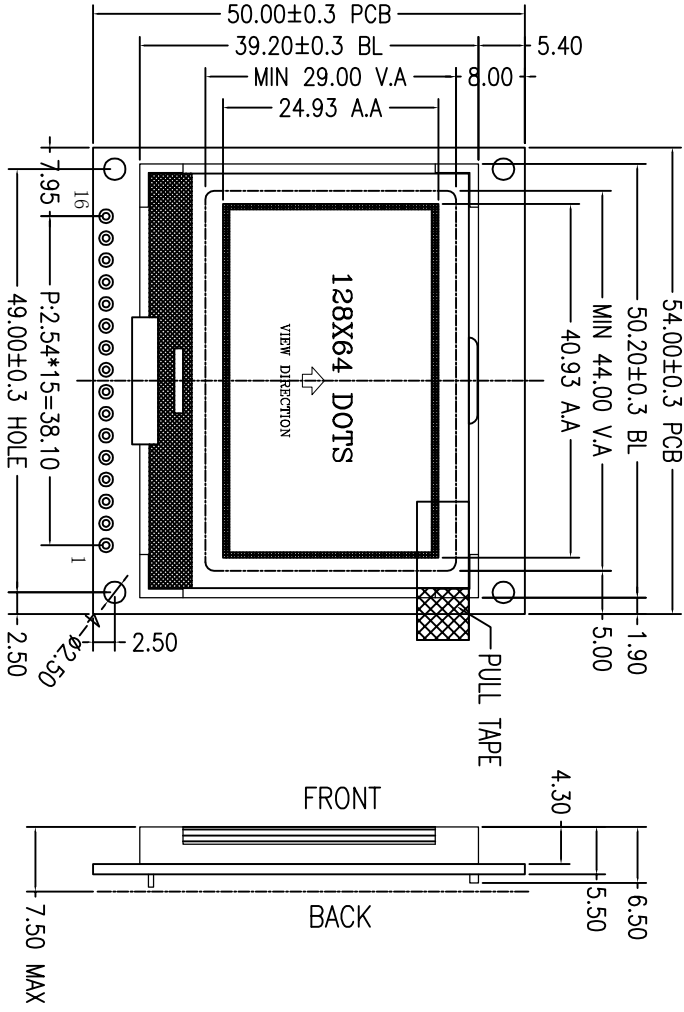

- Specification:
1. Display mode: FSTN/POSITIVE/TRANSFLECTIVE
 2. Drive condition: 1/65 Duty, 1/9Bias, VDD=3.3V
 3. Viewing direction: 6 O'clock
 4. Operating temperature: -20°C to +70°C
 5. Backlight color: White Edge/4 leds, Parallel
 6. Drive IC: ST7565R/ST7567
 7. Connector: FPC
 8. Unspecified tolerance: ±0.30mm.
 9. ROHS compliant

VIEW DIRECTION

SCALE	FREE	TOLERANCE	±0.2
UNIT	mm	DRG DATE	
MATERIAL		DRAWN BY	
FINISH		CHECKED BY	
		APPROVED BY	
PROJECT NO:		深圳尚视界科技有限公司	
MODULE NO:		Shenzhen SUN display Technology Co.,LTD	
DCN	A4	DWG:	
P	1 OF 1		A