


Customer's Approval

Customer

Date

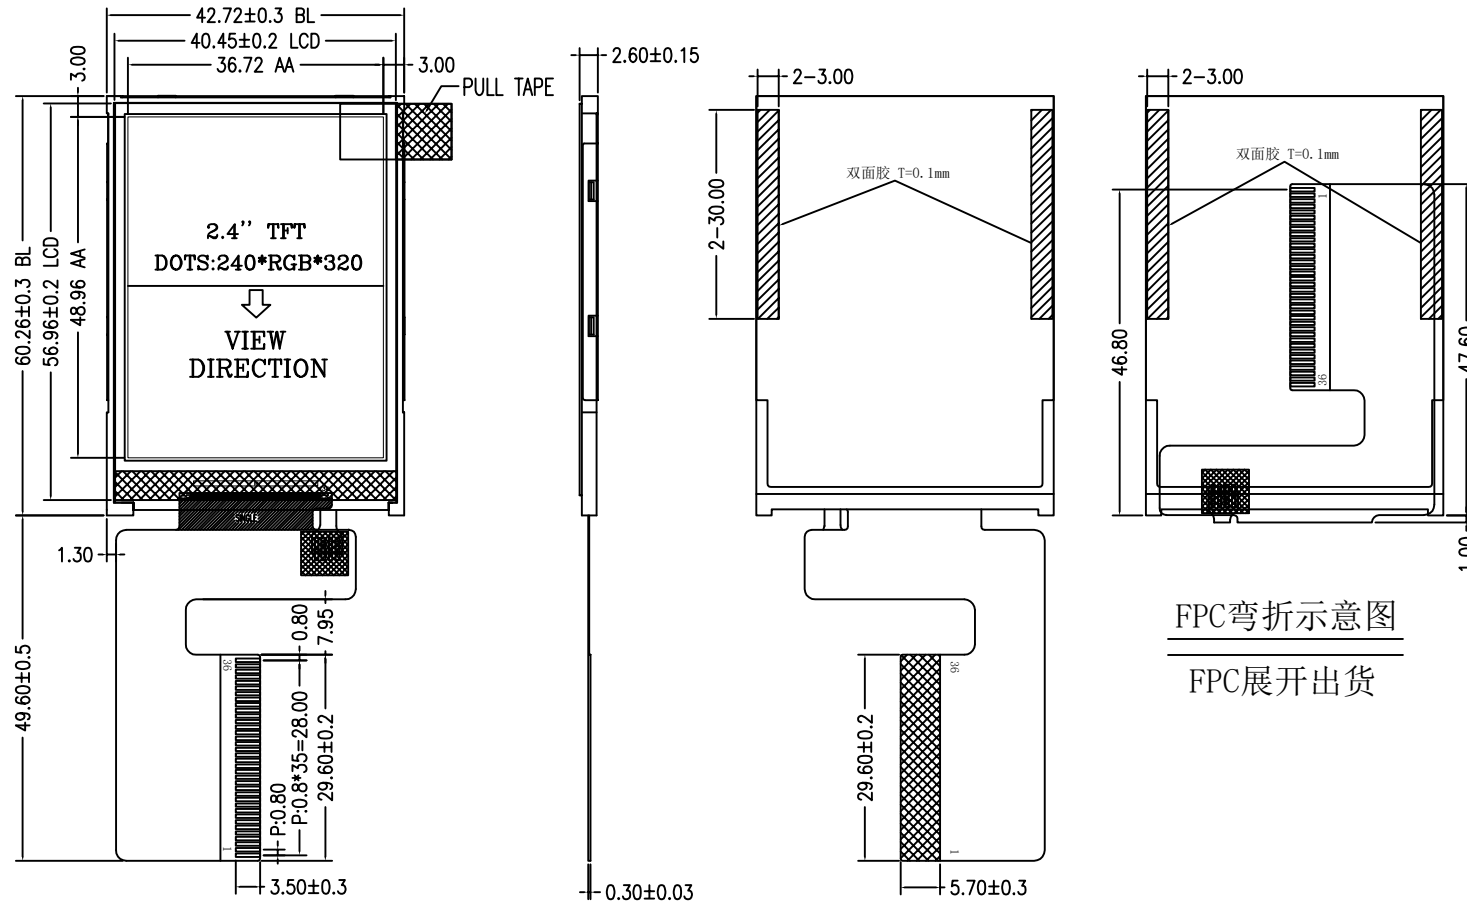


PIN	SYMBOL	PIN	SYMBOL
1	LEDA	21	D3
2	LEDK	22	D2
3	LEDK	23	D1
4	LEDK	24	IMO
5	LEDK	25	RD
6	GND	26	WR
7	RESET	27	RS
8	D17	28	CS
9	D16	29	IOVCC
10	D15	30	VCC
11	D14	31	ID
12	D13	32	GND
13	D12	33	NC
14	D11	34	NC
15	D10	35	NC
16	D8	36	NC
17	D7		
18	D6		
19	D5		
20	D4		

FPC弯折示意图  
FPC展开出货

IMO=0	IMO=1
DB17-DB10, DB8-DB1	DB17-DB10
MCU 16 BIT	MCU 8 BIT

NOTES: Main LCD: TFT TRANSMISSIVE 12:00

1. DISPLAY TYPE: NORMAL WHITE
2. OPERATING TEMP: -20° C~70° C
3. STORAGE TEMP: -30° C~80° C
4. MAIN LCD DRIVER: ST7789V
5. BACKLIGHT: 4CHIP-WHITE LED
6. ROHS COMPLIANCY
7. GENERAL TOLERANCE: ±0.2

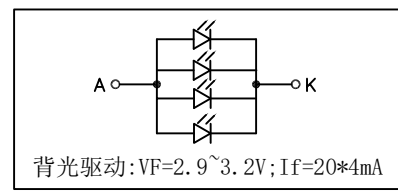

REVISED RECORD		深圳市上线电子有限公司				
A			UNIT	SCALE	PAGE	DRAWN BY
B			mm	1:1	1/1	CHECKED BY
C			APPROVED BY			
D			ORG DATE			
E			PRODUCT NO: SX024-QVGA36P-02-V01			