37R4

PiN	Name
1	GND
2	VDD
3	VDD
4	CS
5	RS
6	WR
7	RD
8	RESET
9~24	DB0~DB15
25	GND
26	Y-(YD)
27	X-(XL)
28	Y+(YU)
29	X+(XR)
30	LED-1
31	LED-2
32	LED-3
33	LED-4
34	LED-5
35	LED-A
36	LED-A
37	GND

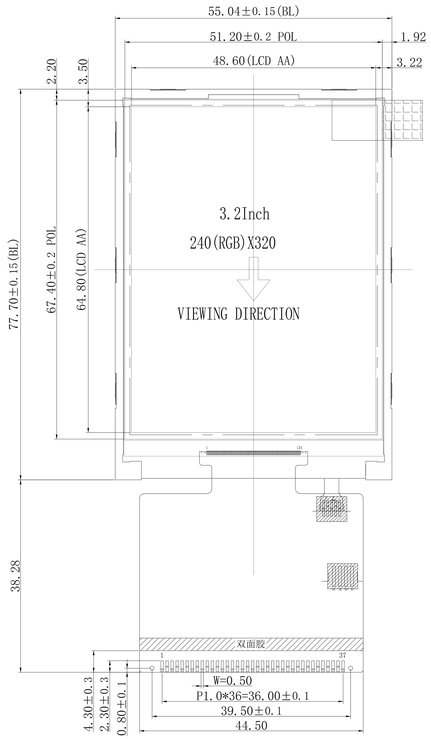

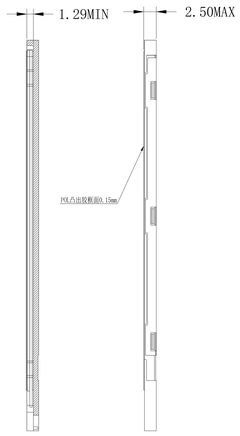

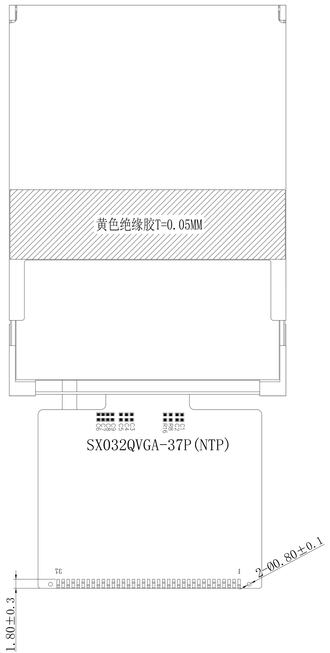

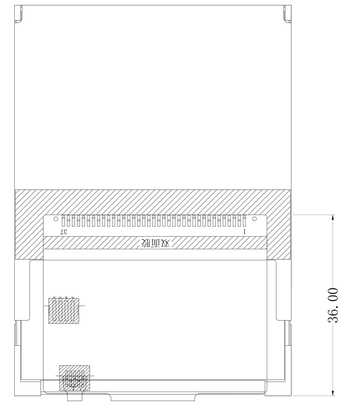

建议：

客户机壳镜片开窗单边比TP银浆线尺寸小0.5mm

NOTE:

1. GENERAL TOLERANCE: ±0.2.
2. (...) IS REFERENCE DIMENSION.
3. * CRITICAL DIMENSION
4. COMPLIABLY RoHS.



Display Type	TFT
	NORMALLY WHITE
	TRANSMISSIVE
Front Polarizer	
Operating Method	
Viewing Angle	12 O'CLOCK
LCD Driver IC	ILI9341V
Operating Voltage	VDD=2.8V
Operation Temperature	-20° C TO 70° C
Storage Temperature	-30° C TO 80° C
Interface	并口
Backlight	WHITE(2.9~3.1V,120mA)

					制图（DRAWN）：	WRP	TITLE	DRAWING NO.
					审核(ME.CHECKED)：		MODULE SPEC.	SX032QVGA-37P（NTP）
					审核(EE.CHECKED)：			UNIT mm SCALE FIT
					批准(APPROVED)：			3rd Angle SHEET OF
V0		新开发	WRP	2020.4.8	客户确认 (CUSTOMER'S APPROVAL)		深圳市上线电子有限公司	
版本(VER)：	标志(SYMBOL)：	变更记录(AMENDMENT)	签名(SIGN)：	日期(DATE)：				