

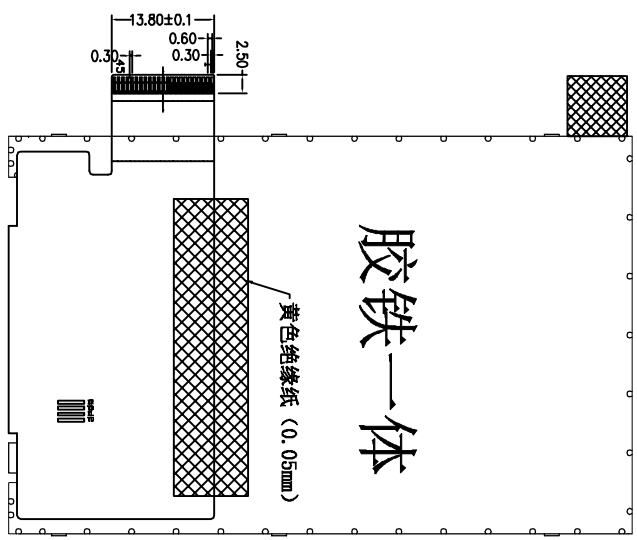


Customer's Approval	
Customer	
Date	

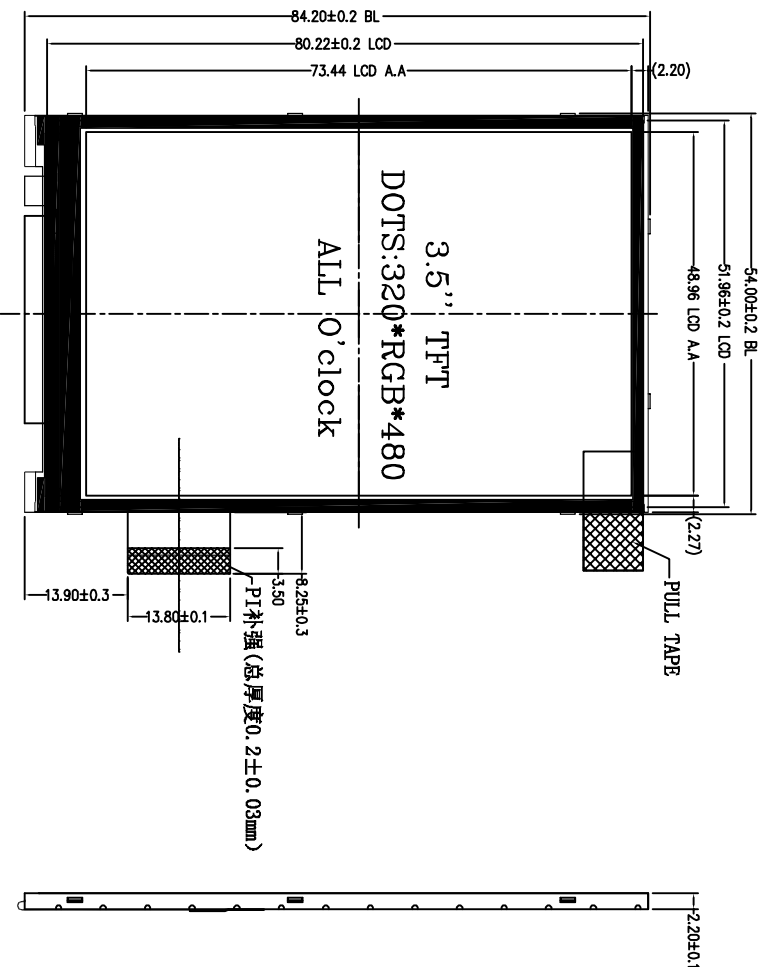

PIN	DESCRIPTION
1	YU
2	XL
3	YD
4	XR
5	LED K
6	LED K
7	LED A
8	GND
9	VCC
10	10VCC
11	TE
12	CS
13	RS
14	WR
15	RD
16	SDA
17	SDD
18	D0
19	D1
20	D2
21	D3
22	D4
23	D5
24	D6
25	D7
26	D8
27	D9
28	D10
29	D11
30	D12
31	D13
32	D14
33	D15
34	D16
35	D17
36	ENABLE
37	DOTCLK
38	HSYNC
39	GND
40	VSYNC
41	RESET
42	1M2
43	1M1
44	1M0
45	GND

- NOTES: Main LCD: TFT 65K/262K/16.7M COLORS
- VIEWING DIRECTION : ALL
 - OPERATING TEMP: -20°C~70°C
 - STORAGE TEMP : -30°C~80°C
 - MAIN LCD DRIVER: ILI9488
 - BACKLIGHT: 6 Chips LED parallel
 - ROHS COMPLIANCY
 - GENERAL TOLERANCE:±0.2



REVISED RECORD				深圳市上线电子有限公司			
A							
B							
C							
D							
E							

PRODUCT NO.	SCALE	PAGE	DRAWN BY	QIAO
SX035HVG445P-01-V01	1:1	1/1	CHECKED BY	
			APPROVED BY	
			ORG DATE	