




Customer's Approval	
Customer	
Date	

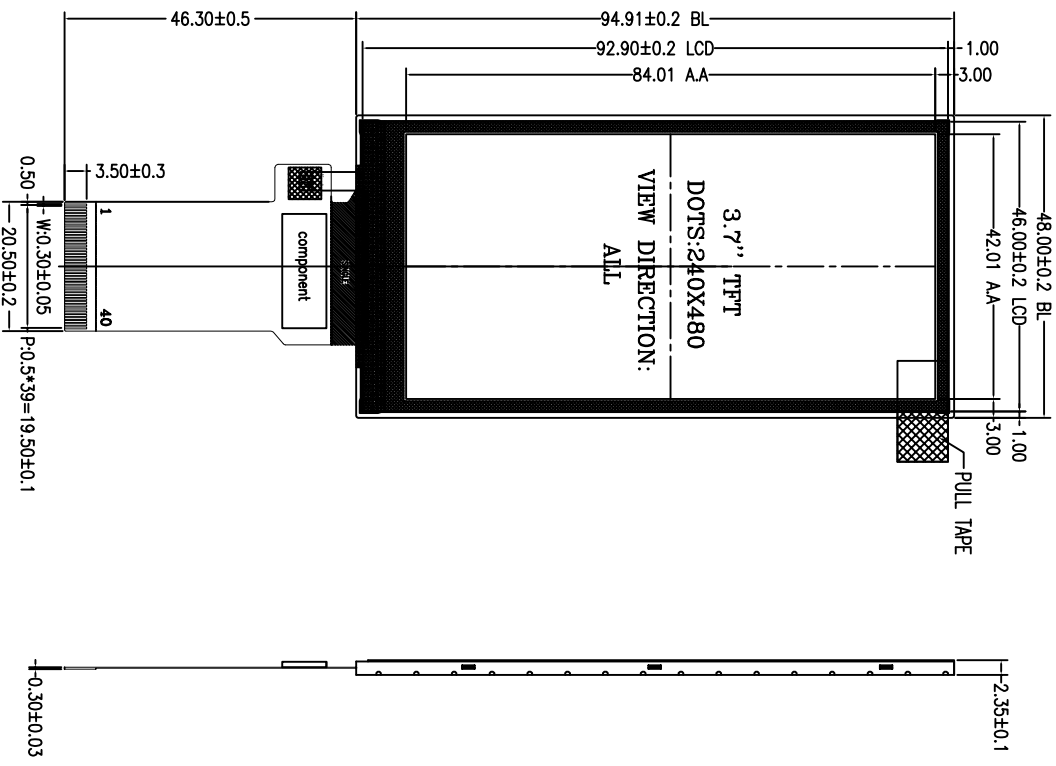

1	XL
2	YL
3	XR
4	YD
5	GND
6	IOVCC(1.8/2.8V)
7	VCC(2.8V)
8	FLMARK
9	CS/SPI CS
10	RS/(SPI SCL)
11	WR/(SPI RS)
12	RD
13	SPI SD/SDA
14	SPI SDO
15	RESET
16	GND
17	DB0
18	DB1
19	DB2
20	DB3
21	DB4
22	DB5
23	DB6
24	DB7
25	DB8
26	DB9
27	DB10
28	DB11
29	DB12
30	DB13
31	DB14
32	DB15
33	A
34	K
35	K
36	K
37	GND
38	IM0
39	IM1
40	IM2

IN2	IM1	IM0	MCU-MODE	DB PIN INUSE
0	1	1	80 MCU 8 BIT	D7-0 D7-0
0	1	0	80 MCU 16 BIT	D7-0 D15-0
1	0	1	3WIRE 9 BIT DATA	SDA IN/OUT
1	1	1	4WIRE 8 BIT DATA	SDA IN/OUT

- NOTES: Main LCD: TFT TRANSMISSIVE ALL
1. DISPLAY TYPE: NORMAL WHITE
  2. OPERATING TEMP: -20° C~70° C
  3. STORAGE TEMP: -30° C~80° C
  4. MAIN LCD DRIVER: ILI9488
  5. BACKLIGHT: 4\*2 CHIP-WHITE LED
  6. ROHS COMPLIANCY
  7. GENERAL TOLERANCE: ±0.2

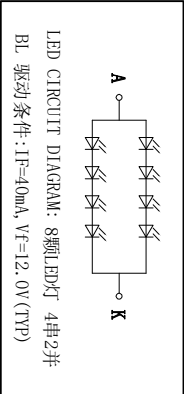

REVISED RECORD				
A				
B				
C				
D				
E				

深圳市上线电子有限公司

PRODUCT NO:	UNIT	SCALE	PAGE	DRAWN BY
	mm	1:1	1/1	CHECKED BY
PRODUCT NO:	SX037-WQVGA40P-01-V01			APPROVED BY
				ORG DATE