
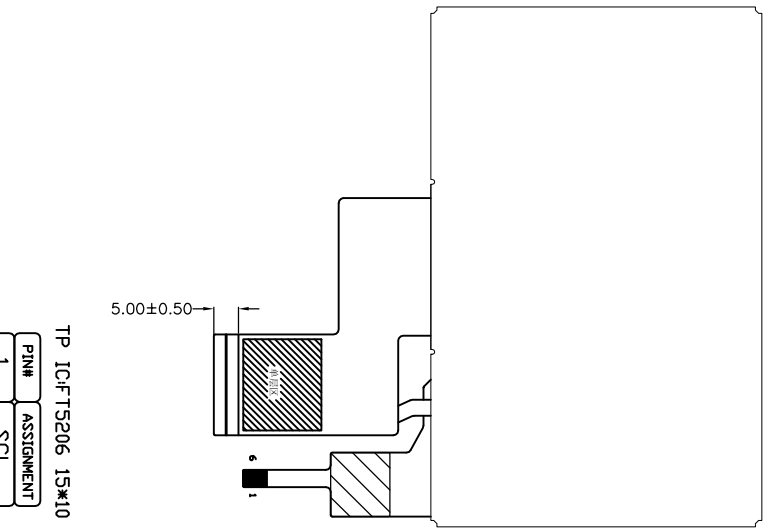
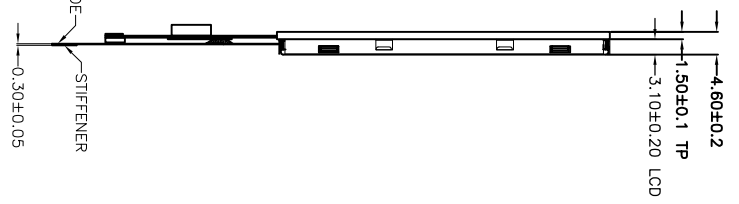


Customer's Approval	
Customer	
Date	

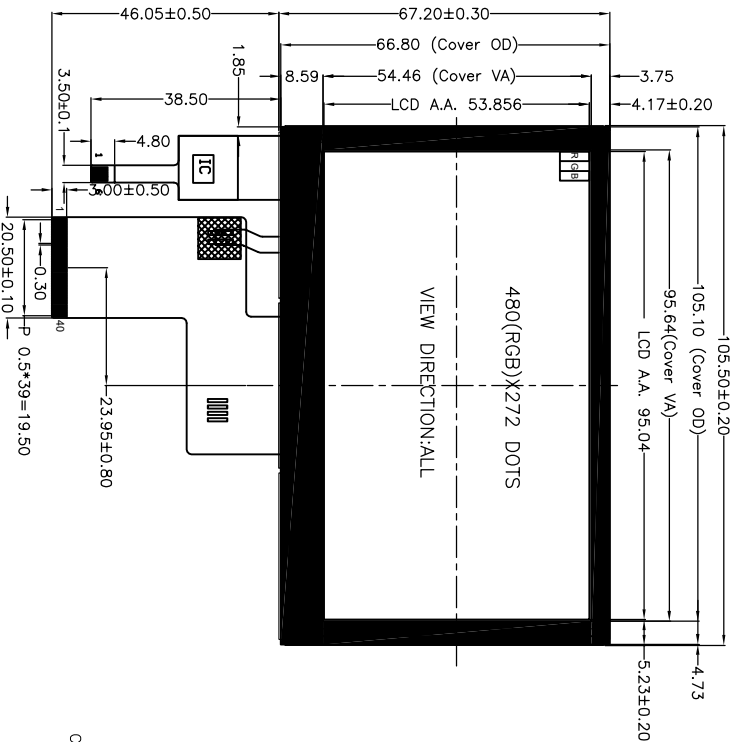


FPC INTERFACE

1	VLED-
2	VLED+
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	PC1K
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	XR
38	YD
39	XL
40	YU

- NOTE:
- 1.DISPLAY TYPE: 4.3" TFT,NORMALLY WHITE,TRANSMISSIVE
 - 2.RESOLUTION: 480(RGB)X272
 - 3.VIEWING DIRECTION: ALL
 - 4.DRIVER IC: ST7282
 - 5.OPERATING VOLTAGE: 3.3V
 - 6.OPERATING TEMP: -20°C TO +70°C
 - 7.STORAGE TEMP: -30°C TO +80°C
 - 8.BACKLIGHT: 7 CHIP-WHITE LED,IF=20mA
 - 9.Environmental Protection Requirements: RoHS

- TP 参数:
1. 工作电压: 5 V
 2. 透光率: ≥85%
 3. 表面硬度: 6H
 4. 工作环境: -20°C~+70°C, ≤90%RH
 5. 储存环境: -30°C~+80°C, ≤90%RH
 6. 未注尺寸公差按±0.2mm



TP ICFT5206 15*10

PIN#	ASSIGNMENT
1	SCL
2	SDA
3	VDD
4	RESET
5	INT
6	GND

REVISED RECORD

A							
B							
C							
D							
E							

深圳市上线电子有限公司

UNIT	SCALE	PAGE	DRAWN BY
mm	1:1	1/1	
PRODUCT NO:	SX043-HHVGA40P-01-V01	CHECKED BY	
APPROVED BY		ORG DATE	