右1 16L6N5

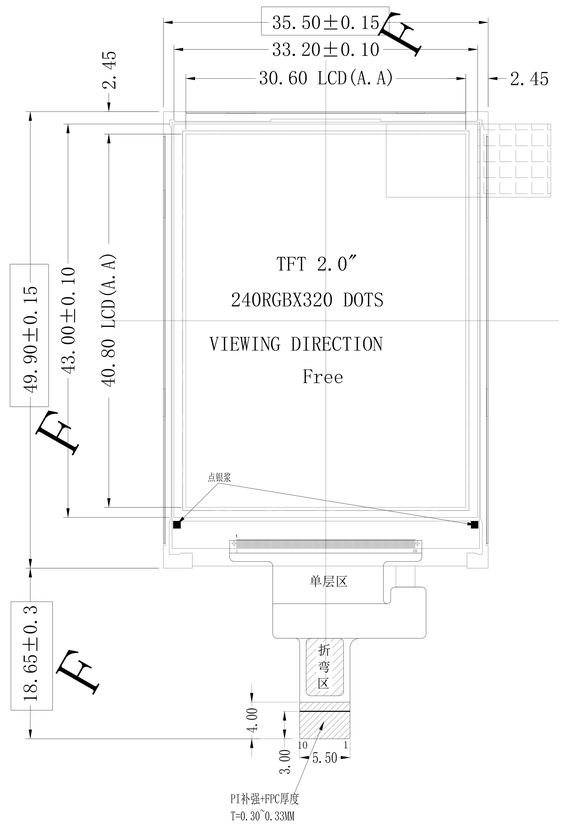

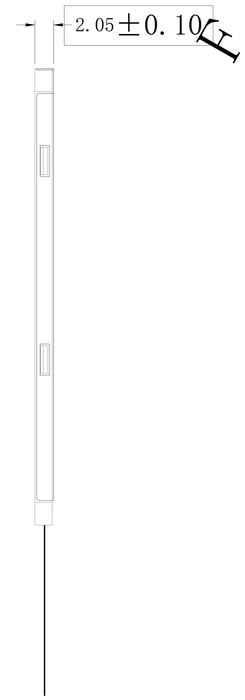

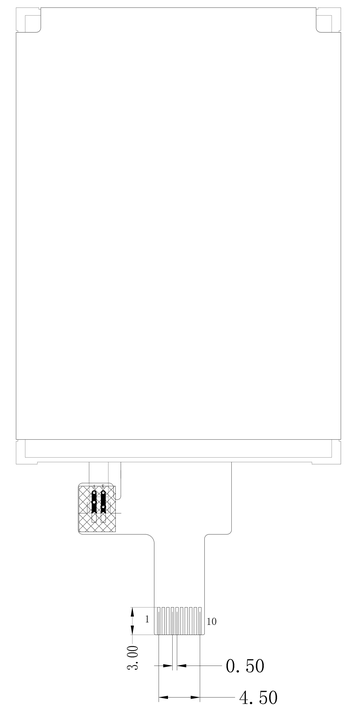

PIN	SYMBOL
1	LEDK
2	LEDA
3	VDD 3.3V
4	TE
5	CS
6	RESET
7	D/C
8	SCLK
9	SDA
10	GND

NOTE:
1. GENERAL TOLERANCE: ±0.2.
2. (...) IS REFERENCE DIMENSION.
3. * CRITICAL DIMENSION
4. COMPLIABLY RoHS.

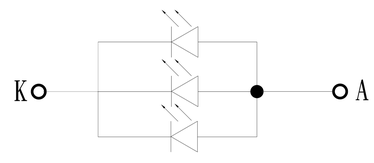

Display Type	TFT
	NORMALLY WHITE
	TRANSMISSIVE
Front Polarizer	
Operating Method	
Viewing Angle	ALL
LCD Driver IC	ST7789V2-G4-A
Operating Voltage	VDD=2.8V
Operation Temperature	-20° C TO 70° C
Storage Temperature	-30° C TO 80° C
Interface	CPU
Backlight	WHITE(3.0V,60mA)

V0		新开发	LXY	2018.5.14	
版本(VER):	标志(SYMBOL):	变更记录(AMENDMENT)	签名(SIGN):	日期(DATE):	

制图 (DRAWN):
审核(ME.CHECKED):
审核(EE.CHECKED):
批准(APPROVED):
客户确认 (CUSTOMER'S APPROVAL)

TITLE
MODULE SPEC.

DRAWING NO.
SX-020HS1003N0-18A0-S0-XY

UNIT	mm	SCALE	FIT
3rd Angle		SHEET	OF

深圳市上线电子有限公司