
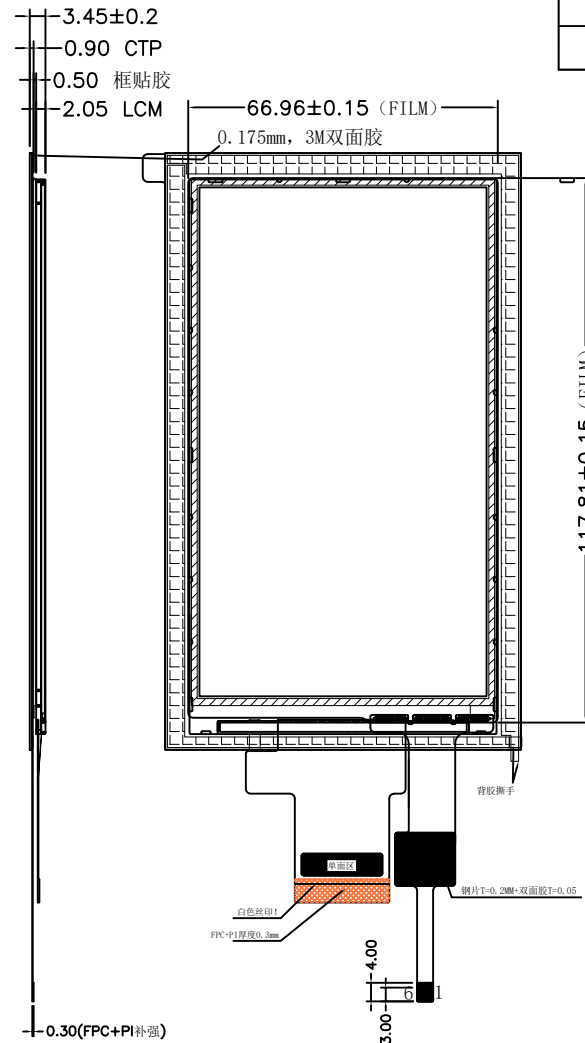


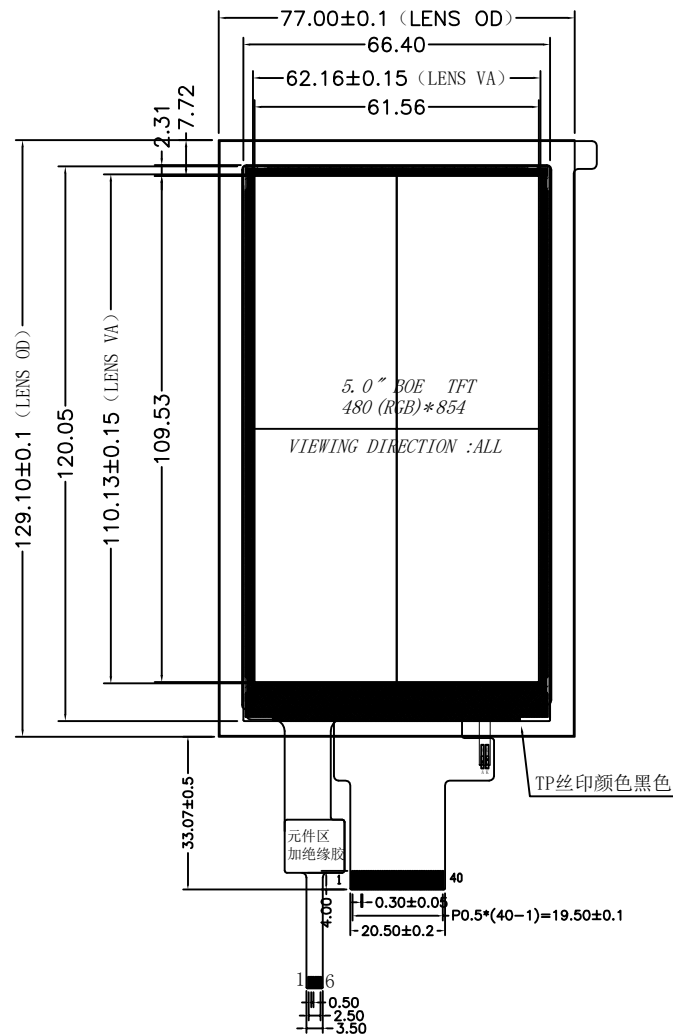

Customer's Approval

Customer

Date


PIN	PIN Name
1	LED-
2	LED+
3	GND
4	VCI
5~12	R0~R7
13~20	G0~G7
21~28	B0~B7
29	GND
30	PCLK
31	NC
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	RESET
38	/CS
39	SCL
40	SDI

PIN	Define
1	GND
2	VDD 3.3V
3	SCL
4	SDA
5	RESET
6	INT

TP技术参数:

- 1.G+FF; IC:GT911;
- 2.工作电压:3.3 ;通讯电压:3.3;
- 3.透光率: ≥82 %;
- 4.表面硬度: ≥6H
- 5.工作环境: -10℃~+60℃, ≤90%RH
- 6.储存环境: -20℃~+60℃, ≤90%RH
- 7.未注尺寸公差按±0.2mm
- 8.产品环保符合ROHS标准


- Main LCD: TFT TRANSMISSIVE ALL
- 1.DISPLAY TYPE: NORMAL BLACK
 2. OPERATING TEMP: -20℃~70℃
 3. STORAGE TEMP : -30℃~80℃
 4. MAIN LCD DRIVER: ST7701SN-G5
 5. BACKLIGHT: 4CHIP-WHITE LED
 6. ROHS COMPLIANCY
 7. GENERAL TOLERANCE: ±0.2

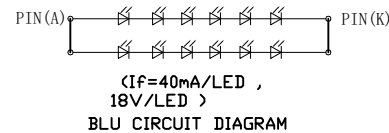

REVISED RECORD

A		
B		
C		
D		
E		

深圳市上线电子有限公司



PRODUCT NO:

UNIT	SCALE	PAGE	DRAWN BY
mm	1:1	1/1	CHECKED BY
			APPROVED BY
			ORG DATE