


**Customer's Approval**

**Customer**


**Date**

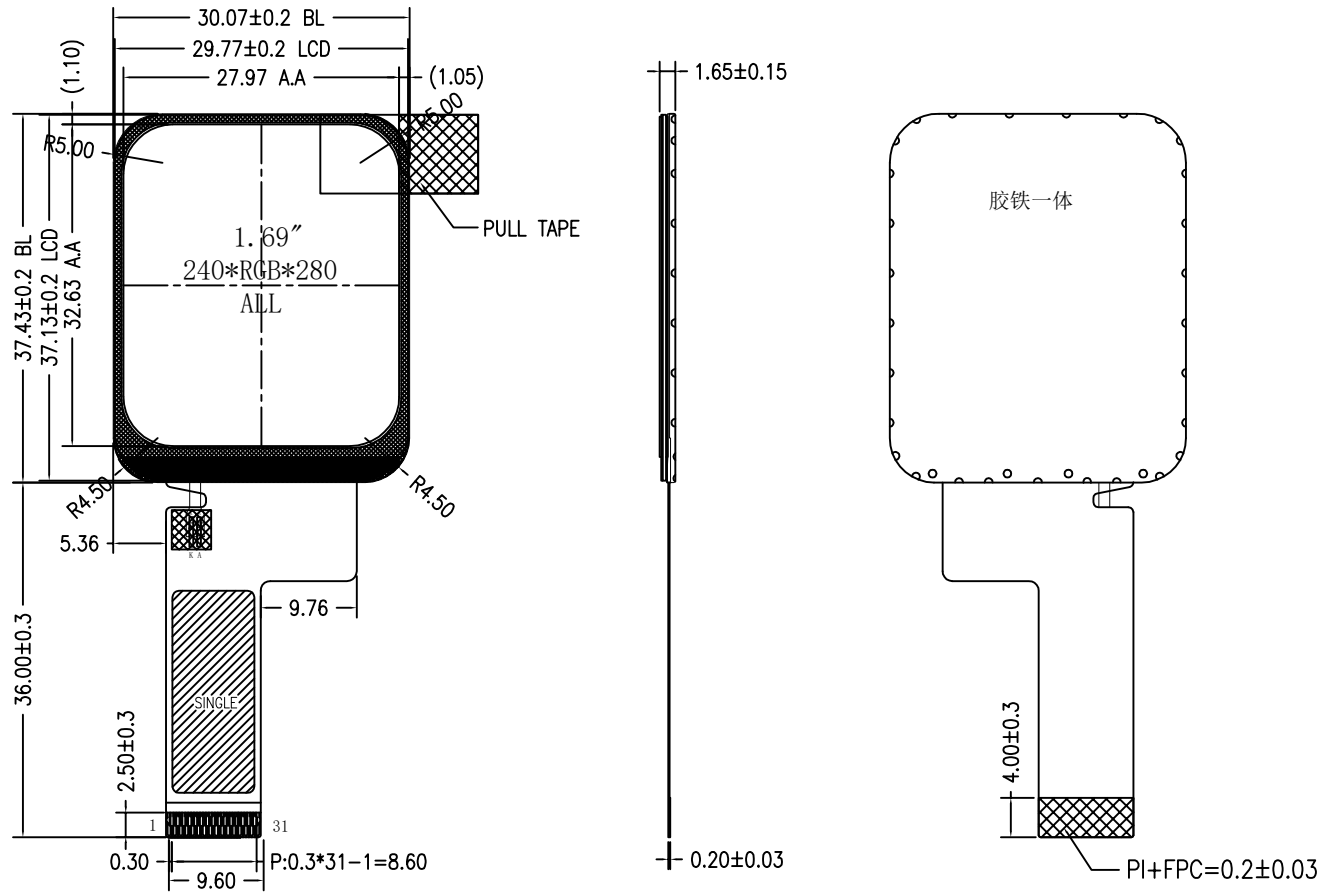

No:	PIN NAME	No:	PIN NAME
1	VCI	17	DB2
2	IOVCC	18	DB1
3	GND	19	DB0
4	DB15	20	SDA
5	DB14	21	GND
6	DB13	22	RD
7	DB12	23	WR
8	DB11	24	RS
9	DB10	25	CS
10	DB9	26	RES
11	DB8	27	IM0
12	DB7	28	IM1
13	DB6	29	IM2
14	DB5	30	A
15	DB4	31	K
16	DB3		

NOTES: Main LCD: 262K TFT TRANSMISSIVE ALL VIEW

1. DISPLAY TYPE: IPS NORMALLY BLACK
2. OPERATING TEMP: -20° C~70° C
3. STORAGE TEMP : -30° C~80° C
4. MAIN LCD DRIVER: ST7789T3
5. BACKLIGHT: 3CHIP-WHITE LED
6. ROHS COMPLIANCY
7. GENERAL TOLERANCE: ±0.2



LED CIRCUIT DIAGRAM

**REVISED RECORD**

REVISED RECORD		深圳市上线电子有限公司						
A			UNIT	SCALE	PAGE	DRAWN BY	QIAO	
B			mm	1:1	1/1	CHECKED BY		
C			PRODUCT NO:	SX017-QVGA3-31P-01-V01			APPROVED BY	
D								ORG DATE
E								