

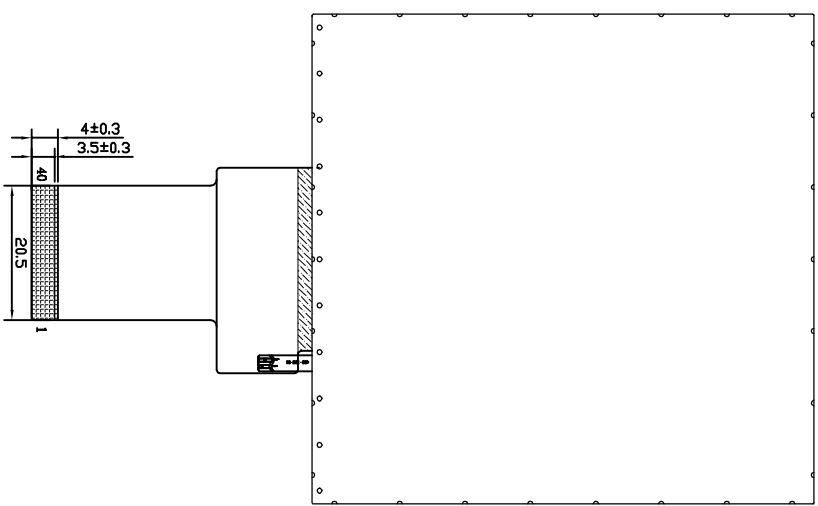


Customer's Approval	
Customer	
Date	

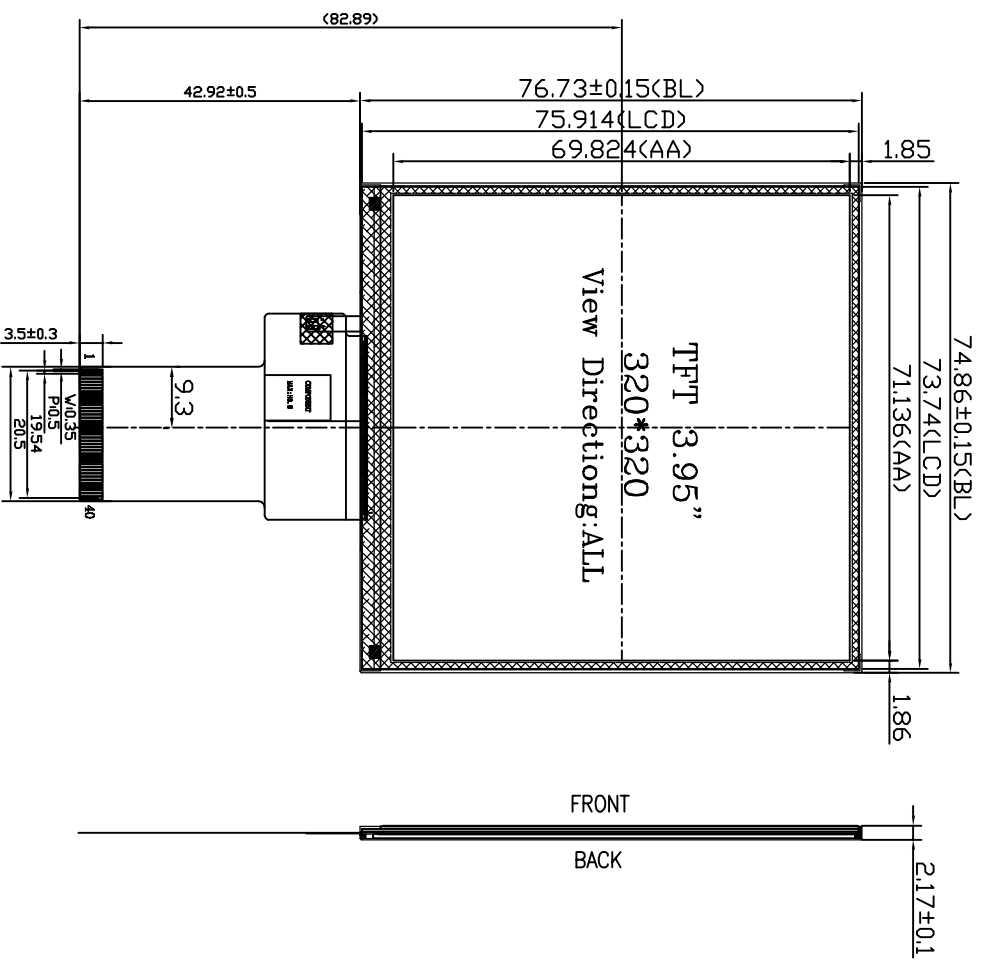

1	GND
2	GND
3	ID/VCC
4	VCC
5	CS
6	WR/SPL_SCL
7	RD
8	RS
9	SPL_SDA
10	SD0
11	D0
12	D1
13	D2
14	D3
15	D4
16	D5
17	D6
18	D7
19	D8
20	D9
21	D10
22	D11
23	D12
24	D13
25	D14
26	D15
27	GND
28	RESET
29	GND
30	GND
31	TP-INT
32	TP-SDA
33	TP-SCL
34	TP-RESET
35	TP-VCI
36	GND
37	LEDA
38	LEDA
39	LEDK
40	LEDK

- NOTES: Main LCD: TFT 65K/262K/16.7M COLORS
1. VIEWING DIRECTION : ALL
 2. OPERATING TEMP: -20°C~70°C
 3. STORAGE TEMP : -30°C~80°C
 4. MAIN LCD DRIVER: IL19488
 5. BACKLIGHT: 10 Chips LED
 6. ROHS COMPLIANCY
 7. GENERAL TOLERANCE:±0.2

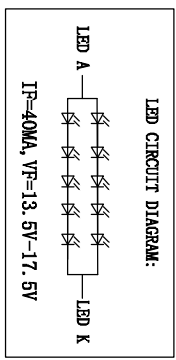

REVISED RECORD			
A			
B			
C			
D			
E			
PRODUCT NO: SX396SQVGA44P-01-V01		UNIT	SCALE
		mm	1:1
			1/1
DRAWN BY		CHECKED BY	QIAO
APPROVED BY		ORG DATE	

深圳市上线电子有限公司